


Distak-L

Emulsifiable anti-adhesive release agent for wood shuttering

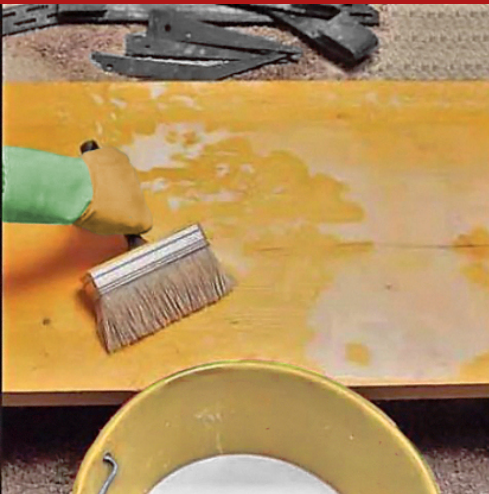

Anti-adhesive release agent, emulsifiable in water, based on aromatic alkylates and specific agents, for easy removal of wooden formworks during dismantling. To be applied by spraying or roller to formworks dry and free of any soiling.

CUSTOMS CODE: 3811 2100

COMPONENTS: Single-component

APPEARANCE: Liquid

AVAILABLE COLORS: Orange

PACKAGING AND DIMENSIONS: Plastic can 25 l - Barrel 220 l

FEATURES AND BENEFITS

Distak-L is emulsifiable with water in concentrations between 1:10 and 1:20. The action of Distak-L is of physical type: the properly emulsified and applied product forms an extremely thin separating film between the formwork and the fresh concrete, allowing easy detachment and surfaces free from stains and soiling.

FIELDS OF APPLICATION

Release treatments for concrete castings in normal and pre-coated wooden formworks.

ALLOWED SUPPORTS

Wood

MODE OF USE

Distak-L is a product that is ready to be emulsified in water at a concentration between 1:10 and 1:20. To obtain a correct emulsion it is essential to add the product to water and not vice versa. It is necessary to mix slowly and carefully, until a white, stable emulsion is obtained. With one litre of Distak-L, correctly applied, you can treat roughly about 50 m² of wood formwork. Caution: exceeding the product quantity can endanger the success of the casting. It is not suitable for metal formworks. Do not use this product with dilutions higher than those specified as they may not be stable and they are not effective.

APPLICATION METHODS


Brush - Sprayer - Paint roller





TOOL CLEANING


Water

KEY FEATURES

 Density: 0.90 kg/dm³

 Shelf-life: 12 months

 Mix with water: 1:10 / 1:20 _

 Temperature of use: +5 / +35 °C

TECHNICAL SPECIFICATIONS

pH 7

CONSUMPTION

With 1 litre of Distak-L, correctly applied, it is possible to treat approximately 50 m² of wooden formwork.

STORAGE AND CONSERVATION

Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance.

PHOTO GALLERY



Produced and distributed by **AZICHEM srl**
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy
Tel: +39 0376.604185 / 604365
Fax: +39 0376 604398
www.azichem.com - info@azichem.com

Update of **01-04-2021**
Terms of sale and legal notices available at
<https://www.azichem.com/general-sales-conditions>
Total pages of this document: 3

ADDITIONAL CONTENT



WARNINGS AND PRECAUTIONS

The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge. Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage. Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: www.azichem.com. The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: www.azichem.com.

It is forbidden to dispose of the product and/or packaging in the environment.

