

Osmokoll

Osmotic two-component type weatherstrip adhesive cement



A two-component, certified cementitious adhesive based on hydraulic binders free from harmful additions, with modifying and flexibilising resins, selected siliceous and calcareous sands, reactive fillers with high pozzolanic activity and cellulosic thickeners, perfect for the preparation of adhesive mixtures that are trowelable with high deformation and impermeability capacity. Ideal for bonding coatings of any kind, even with low absorption, on horizontal and vertical surfaces, both internal or external, including with low porosity (for example, coatings on indoor swimming pools).

CUSTOMS CODE: 3824 5090

COMPONENTS: Two-components

APPEARANCE: Powder + Liquid

AVAILABLE COLORS: Gray

PACKAGING AND DIMENSIONS: Bag 25 kg [A] - Plastic can 6 kg [B] - Kit: 1 Bag 25 kg [A] + 1 Plastic can 6 kg [B]

OBTAINED CERTIFICATIONS AND REGULATIONS



FIELDS OF APPLICATION

Bonding tiles, waterproofing and anti-humidity coatings, structures and masonry exposed or underground provided they are sufficiently porous and absorbent and free from any waterproofing and / or water-repellent surface treatment, whether chemical (siloxanes, epoxies, polyurethanes, etc.) or natural (wax-up). Bonding small vitreous tiles for swimming pools. Bonding tiles on Osmocem Flex or Osmocem D type osmotic coatings on terraces and balconies.

ALLOWED SUPPORTS

Plasters - Concrete - Cement-based or lime-based mortars - Tiles - Floor screed - Porous stone

PREPARATION OF SUPPORTS

Application surfaces should be clean, free of soiling, crumbling and non-adhering parts, dust, etc., water repellent treatments in general, etc. conveniently saturated with water until they reach the condition "saturated with dry surface".

MODE OF USE

Mix the powder component (component A) with the hydrating solution (component B) with a drill at a low number of revolutions, pouring the powder progressively in the liquid, continue mixing until a homogeneous lump-free mixture is obtained. After mixing is completed wait a few minutes and stir again before proceeding with the application.



APPLICATION METHODS

Notched finishing trowel

TOOL CLEANING

Water

KEY FEATURES

↔ Max. recommended thickness: 10 mm

↔ Min. recommended thickness: 2 mm

🕒 Pot-life: 50 min

🌡️ Temperature of use: +5 / +35 °C

🚫^{MAX} Maximum diameter of aggregate: 0.5 mm

🔥 Nonflammable

🕒 Shelf-life: 12 months

☀️ UV-resistant

TECHNICAL SPECIFICATIONS

UNI EN 1015-11

Compressive strength **25 N/mm²**

Commissioning **3-5 day**

UNI EN 1542

Bonding force **2.8 N/mm²**

EN 12004

2.3 N/mm²

EN 12004

Reaction to fire **CLASS F**

0.3 mm

Strain at break, characteristic value **2.6 mm**

a 20°C

Complete hardening at 20°C **80 - 90 min**

EN 12004

Durability - Tensile adhesion after thermal aging **2.5 N/mm²**

a 30'

Open time \geq **0.5 MPa**

UNI EN 196/1

Flexural strength **7 N/mm²**

EN 12004

Durability - Tensile adhesion after immersion in water **1.3 N/mm²**

Tile registration time **40 min**

EN 12004

Durability - Tensile adhesion after freeze-thaw cycles **1.5 N/mm²**

Execution of wall joints **4-8 h**

A:B

Mixing ratio of the components **4.1:1**

UNI EN 1015-6

Density **1750 g/l**

Floor joint execution **20 h**

UNI EN 1015-18

Capillary absorption $< 0.3 \text{ kg} \cdot \text{h}^{0.5} / \text{m}^2$

Walkability **20 h**

CONSUMPTION


Use from 5 to 6 kg/m² of Osmokoll depending on the type of support and the type of material to be bonded.

STORAGE AND CONSERVATION

Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance. Protect from humidity.



PHOTO GALLERY

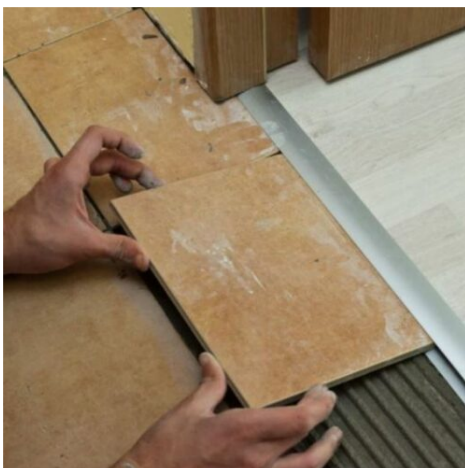

ADDITIONAL CONTENT



Produced and distributed by **AZICHEM srl**
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy
Tel: +39 0376.604185 / 604365
Fax: +39 0376 604398
www.azichem.com - info@azichem.com

Update of **24-10-2024**
Terms of sale and legal notices available at
<https://www.azichem.com/general-sales-conditions>
Total pages of this document: 4

WARNINGS AND PRECAUTIONS

It is always essential to carry out preliminary tests to verify the appropriateness of the product, depending on specific requirements.

Do not apply in case of direct exposure to sunlight and cure the protection and moist hardening.

Do not apply on little or non-porous substrates or previously coated with water-repellent treatments in general, if not after appropriate roughening by bush hammers, sanders and equipment suitable for preparatory treatments of substrates, or after appropriate treatment with suitable polymeric primers. The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge.

Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage.

Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: www.azichem.com. The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: www.azichem.com.

It is forbidden to dispose of the product and/or packaging in the environment.

