


## Protech Tunnel

Tempera paint, high covering, for tunnels, galleries and subways

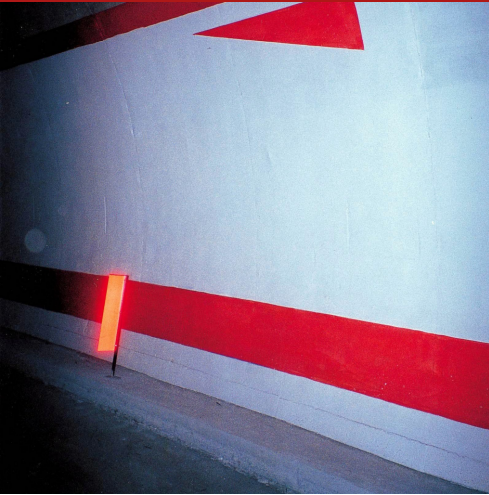

Tempera paint with high specific coverage, high dry residue and discrete water repellence, for painting signs and decorative interior surfaces generally relating to tunnels, galleries, subways, etc. Pure white: RAL 9010 Vermilion: RAL 2002

**CUSTOMS CODE:** 3209 1000

**COMPONENTS:** Single-component

**APPEARANCE:** Liquid

**AVAILABLE COLORS:** Request available colors

**PACKAGING AND DIMENSIONS:** Pail 15 l

### FIELDS OF APPLICATION

Painting vertical and decorative signs for tunnels, galleries and subways.

### ALLOWED SUPPORTS

Concrete

### PREPARATION OF SUPPORTS

The surfaces of application should be clean, free of any soiling, crumbling and non-adhering parts, or non-absorbent, dust, pre-existing paints, etc. Apply the specific fixative PROTECH FIX TUNNEL on the surfaces to be treated, using low pressure airless.

### MODE OF USE

Apply Protech Tunnel with airless pumps at low pressure, diluting it preliminarily with water in the recommended percentage of 30%-40% by weight of the product.

### APPLICATION METHODS




Low pressure airless nebulizer - Brush - Paint roller






## TOOL CLEANING

Water

## KEY FEATURES

-  Density: 1.56 g/cm<sup>3</sup>
-  Shelf-life: 12 months
-  Temperature of use: + 5 / +35 °C

-  Nonflammable
-  Solvent-free
-  To be applied in two coats

## TECHNICAL SPECIFICATIONS

Dry residue **68 %**

Alkali-resistant material

Complete hardening at 20°C **5-8 h**

## CONSUMPTION

Apply from 0.30 to 0.50 liters of Protech Tunnel per square metre of surface to be painted.

## STORAGE AND CONSERVATION

Protect from freezing. Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance.

## PHOTO GALLERY



Produced and distributed by **AZICHEM srl**  
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy  
Tel: +39 0376.604185 / 604365  
Fax: +39 0376 604398  
[www.azichem.com](http://www.azichem.com) - [info@azichem.com](mailto:info@azichem.com)

Update of **11-07-2022**  
Terms of sale and legal notices available at  
<https://www.azichem.com/general-sales-conditions>  
**Total pages of this document: 3**

## ADDITIONAL CONTENT



## WARNINGS AND PRECAUTIONS

The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge. Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage. Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: [www.azichem.com](http://www.azichem.com). The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: [www.azichem.com](http://www.azichem.com).

It is forbidden to dispose of the product and/or packaging in the environment.

