


## Consilex No-Stain

Water- oil repellent, stain resistant concentrate for alkaline materials

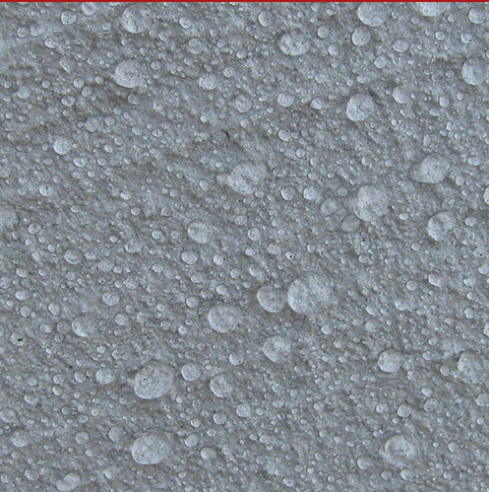

Consilex No-Stain is a solvent-based mixture that renders water- and oil-repellent inorganic materials alkaline, even with poor porosity. A Consilex No-Stain treatment results not only in water repellency but also resistance to stains and oil. The pores of the materials remain open whilst the water vapour breathability is unchanged. Grease oil and stains can be easily removed from the treated surfaces.

**CUSTOMS CODE:**

**COMPONENTS:** Single-component

**APPEARANCE:** Liquid

**AVAILABLE COLORS:** Transparent tending pale yellow

**PACKAGING AND DIMENSIONS:** Plastic can 5 kg - Plastic can 25 kg

### FIELDS OF APPLICATION

A treatment that is impregnating, water- and oil-repellent, stain-resistant and non-film, including for scarcely-absorbent materials.

### ALLOWED SUPPORTS

Concrete - Prefabricated concrete - Drywall - Mixed walls (bricks and stones) - Brickworks - Stone walls - Porphyry and natural stones

### PREPARATION OF SUPPORTS

It is recommended that surfaces be treated prior to remove soluble salts and dirt, along with parts with poor surface adhesion. Cracks greater than 0.3 mm must always been filled. Apply to dry surfaces. In the event of rain or surface washing, wait 3 days at a temperature of at least 20° C prior to treatment.

### MODE OF USE

Diluted solutions of Consilex No-Stain are generally applied to the surface by brush or spray. The water- and oil-repellent effect develops within 24-48 hours. Due to possible changes in colour, it is recommended to carry out preliminary tests before treatment.

### APPLICATION METHODS




Brush - Sprayer





## TOOL CLEANING

Nitro thinner

## KEY FEATURES

-  Density: 0.95 kg/l
-  Solvent-based product
-  Use wearing protective gloves

-  Shelf-life: 12 months
-  Use wearing protective glasses


## CONSUMPTION

Consilex No-Stain comes in concentrated form and should be diluted before use with mineral ranges of concentrations from 1:10 to 1:20.

## STORAGE AND CONSERVATION

Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance. Opened containers must be used immediately.

## PHOTO GALLERY

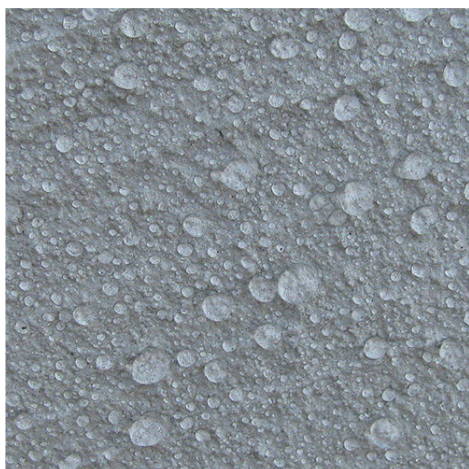

## ADDITIONAL CONTENT



## WARNINGS AND PRECAUTIONS

The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge. Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage. Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: [www.azichem.com](http://www.azichem.com). The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: [www.azichem.com](http://www.azichem.com).

It is forbidden to dispose of the product and/or packaging in the environment.

